


DA3750 1000W Digital Power Amplifier

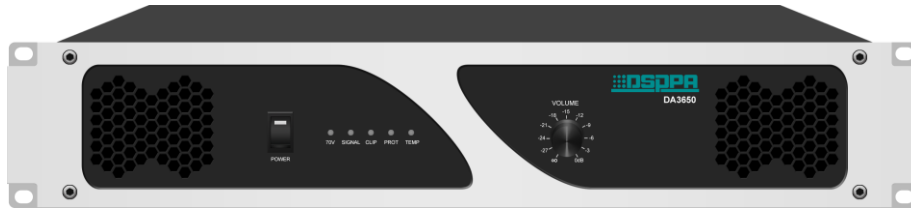

Features

- Highly efficient switching power supply.
- Highly efficient CLASS D amplifier.
- 100V, 70V constant voltage output (common output end), support 100V/70V output real-time switching.
- With perfect and reliable DC output protection, short circuit protection and overheating protection, which improves the safety performance of the machine.
- 5 unit LED indicator for status display.
- 6.35mm socket and XLR socket can easily realize looping connection.
- Output short circuit protection and can recover automatically.

Description

DA3750 is one of the series of digital power amplifier with newly designed appearance and high powers for selection. The machine is nice and neat, and is suitable for factories, schools, hospitals, shops and many other commercial applications.

Specifications

Item	DA3750
RMS (100V)	1000W
RMS (70V)	500W
Min. source electromagnetic force	≤1000mV
SNR	≥80dB
Frequency response	80Hz~16kHz (±3dB)
Total harmonic distortion	≤1% (1kHz, normal condition)
Indicator light	“70V”, "signal", "top cutting", "protection", "over temperature"
Protection	Over temperature, DC, short circuit
Power supply	AC220V/50Hz
Rated power	1500W
Package size (L×W×H mm)	555×455×185
Machine size (L×W×H mm)	483×380×88
Gross weight (Kg)	9.2
Net weight (Kg)	8.0

Technical specifications are subject to change without prior notice.