


DT2200

2x2 Dante Audio Interface

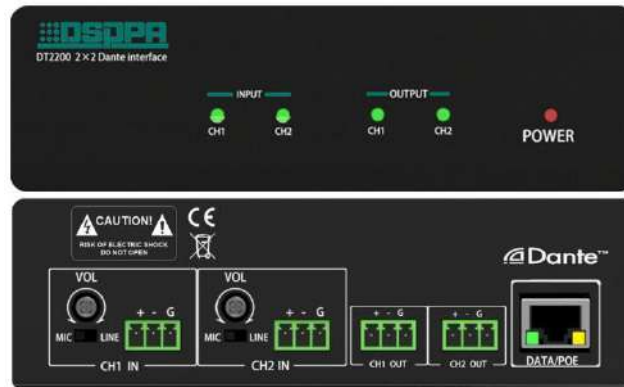

Description

DT2200 is the Hi-Fi audio terminal included in a distributive system and adopts the digital audio transmission technology through Dante LAN network. The matrix function is realized when we utilize the local input and the output of another Dante device simultaneously. There are 2 channels of audio input and 2 channels of audio output. DT2200 can be electrified and controlled by standard +48V PoE switch, or transmit audio signals via POE network interface.

Features


- Distributive system, adopts the digital audio transmission technology through Dante LAN Network
- Adopting 48kHz audio sampling frequency guarantees no compression, no consumption, no delay
- Ethernet 100M standard +48V PoE power supply;
- 2 channels of balanced input, 2 channels of balanced output
- Microphone signal or line signal for input signal choice
- To adjust volume of each channel by changing level

Specifications


Model	DT2200	
Item	Index	
Local imbalanced input is 250mv/1kHz, imbalanced output of another DT2200 is 1V	Input Voltage	≥1V
	Frequency Response (±3dB)	20Hz~20kHz
	SNR	≥80dB
	Input Dynamic Range	≥18dB
	Input Distortion	≤0.5%

Local Microphone input is 2.5mv/1kHz , Imbalanced output of another DT2200 is 1V	Output Voltage	≥1V
	Frequency Response (±1dB)	50Hz~20kHz
	SNR	≥80dB
	Output Distortion	≤0.5%
Power		Standard +48V POE powered
Rated Power		≤5W
Machine Dimension (L×W×H mm)		143X142X44
Package Dimension (L×W×H mm)		258X212X113
Net Weight		0.65KG
Gross Weight		1.15KG

Front / Rear Panel

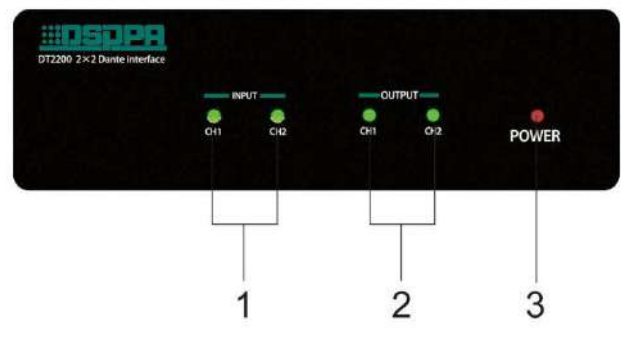

1. Input Indicator
2. Output Indicator
3. Power Indicator

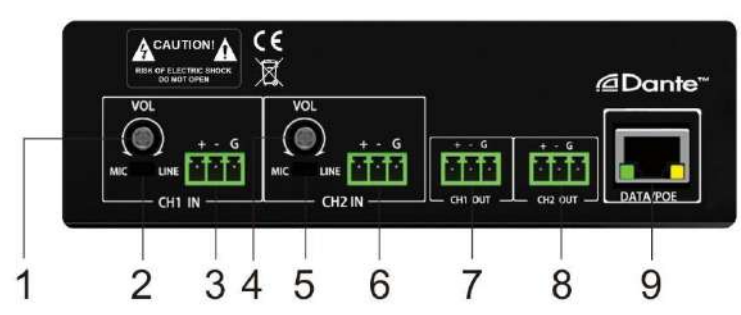

1. CH1 volume adjustment knob
2. CH1 switch of MIC/ LINE input
3. CH1 audio input interface
4. CH2 volume adjustment knob
5. CH2 switch of MIC/ LINE input
6. CH2 audio input interface
7. CH1 output interface
8. CH2 output interface
9. Dante RJ45 network interface